

ivy


SIRC[®]

— Economic & Popular —

KEEPS THE WORLD
MOVING



Part Numbering System

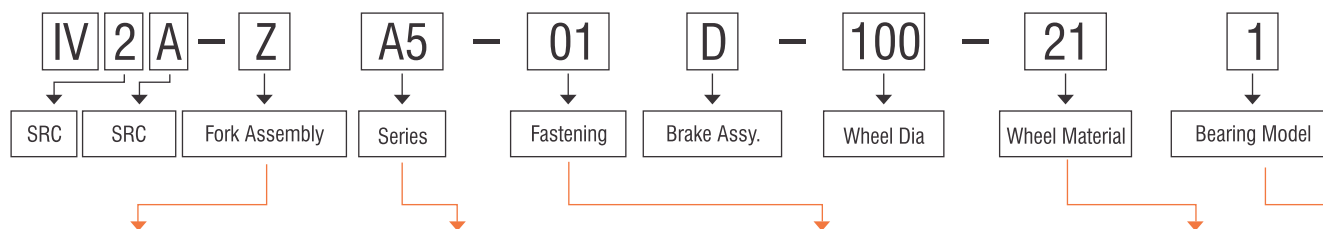

Fork Assembly	Series No.	Fastening	Wheel Material
 Z = (Zinc Plated)	A1	 04 - Fix (FX)	12 = Polyolefin (round tread)
	A2		16 = Hi-tech Polyurethane (round tread)
 B = (Black color painted)	A3	 01 - Swivel (PL)	18 = Iron/Urethane wheel (round tread)
	A5		20 = Polyurethane (flat tread)
		 01D - Swivel + Brake (PK)	21 = Polyurethane (round tread)
		 02 - Thread Stem (TH)	32 = Hi-tech Polyurethane (round tread)
		 02D - Thread + Brake (TK)	51 = Rubber (black)
		 E - Single brake (Plastic) (TK)	53 = Rubber (blue)
			Bearing Model
			 1 = Central precision ball bearing
			 2 = Double ball bearing
			 3 = Derlin bearing
			 4 = Plain bore (bushing)

Wheel and material introduction



Plain bore bearing PP wheel
Size : 25/38/50/63/75 mm

Wheel Structure



IV-2A-ZA1-04-50-124



IV-2A-ZA1-01-63-124



IV-2A-ZA1-01E-75-124



IV-2A-ZA1-02-63-124



IV-2A-ZA1-02E-75-124

Wheel dia (mm)	Tread width (mm)	Load capacity (kg.) Per Pc.	Wheel material	Loading hight (mm)	Swivel radius (mm)	Brake swivel radius (mm)	Plate size (mm)	Thread size (mm)	Bearing	No. Model
25 MM (1")	13	7	POLY PROPYLENE (PP)	35	25	46	(A) 30 (B) 36x33 (C) 24 (D) 4.3		PLAIN BORE	IV-2A-ZA1-04-25-124
										IV-2A-ZA1-01-25-124
										IV-2A-ZA1-01E-25-124
38 MM (1.5")	18	16	POLY PROPYLENE (PP)	50	34	55	A) 36 B) 46X38 C) 28 D) 5.3		PLAIN BORE	IV-2A-ZA1-04-38-124
										IV-2A-ZA1-01-38-124
										IV-2A-ZA1-01E-38-124
50 MM (2")	22	25	POLY PROPYLENE (PP)	65	48	71	(A) 46 (C) 59X47 (B) 35 (D) 6.5	M8X20	PLAIN BORE	IV-2A-ZA1-04-50-124
										IV-2A-ZA1-01-50-124
										IV-2A-ZA1-01E-50-124
										IV-2A-ZA1-02-50-124
										IV-2A-ZA1-02E-50-124
65 MM (2.5")	28	35	POLY PROPYLENE (PP)	82	61	83	(A) 55 (B) 70X58 (C) 42 (D) 8.5		PLAIN BORE	IV-2A-ZA1-04-63-124
										IV-2A-ZA1-01-63-124
										IV-2A-ZA1-01E-63-124
										IV-2A-ZA1-02-63-124
								M12X25		IV-2A-ZA1-02E-63-124
75 MM (3")	28	45	POLY PROPYLENE (PP)	93	66	87	(A) 55 (B) 77X58 (C) 42 (D) 8.5		PLAIN BORE	IV-2A-ZA1-04-75-124
										IV-2A-ZA1-01-75-124
										IV-2A-ZA1-01E-75-124
										IV-2A-ZA1-02-75-124
								M12X25		IV-2A-ZA1-02E-75-124



A2/A1 series



40-90 kg



IV-2A-ZA2-04-75-121



IV-2A-ZA2-01-100-121



IV-2A-ZA2-01D-125-121



IV-2A-ZA2-02-75-121



IV-2A-ZA2-02D-100-121



Wheel Structure

Single ball bearing
PP wheel
Size : 75/100/125mm

Wheel dia (mm)	Tread width (mm)	Load capacity (kg.) Per Pc.	Wheel material	Loading height (mm)	Swivel radius (mm)	Brake swivel radius (mm)	Plate size (mm)	Thread size (mm)	Bearing	NO. Model
75 MM (3")	28	70	POLY PROPYLENE (PP)	104	69	99	(A)75 x 44 (B)91 x 63 (C)71 x 44 (D) 9	M 12 x 25	Single Ball Bearing	IV-2A-ZA2-04-75-121
										IV-2A-ZA2-01-75-121
										IV-2A-ZA2-01D-75-121
										IV-2A-ZA2-02-75-121
										IV-2A-ZA2-02D-75-121
100 MM (4")	28	80	POLY PROPYLENE (PP)	129	85	109	(A)75 x 44 (B)91 x 63 (C)71 x 44 (D)9	M 12 x 25	Single Ball Bearing	IV-2A-ZA2-04-100-121
										IV-2A-ZA2-01-100-121
										IV-2A-ZA2-01D-100-121
										IV-2A-ZA2-02-100-121
										IV-2A-ZA2-02D-100-121
125 MM (5")	28	90	POLY PROPYLENE (PP)	155	104	12	(A)75 x 44 (B)91 x 63 (C)71 x 44 (D)9	M 12 x 25	Single Ball Bearing	IV-2A-ZA2-04-125-121
										IV-2A-ZA2-01-125-121
										IV-2A-ZA2-01D-125-121
										IV-2A-ZA2-02-125-121
										IV-2A-ZA2-02D-125-121



IV-2A-BA1-04-50-214



IV-2A-BA1-01-63-214



IV-2A-BA1-01E-75-214



IV-2A-BA1-02-50-214



IV-2A-BA1-02E-75-214



Wheel Structure

Plain bore bearing
PU wheel
Size : 50/63/75mm

Wheel dia (mm)	Tread width (mm)	Load capacity (kg.) Per Pc.	Wheel material	Loading height (mm)	Swivel radius (mm)	Brake swivel radius (mm)	Plate size (mm)	Thread size (mm)	Bearing	NO. Model
50 MM (2")	22	22	Polyurethane (PU)	65	46	71	(A) 46X35 (B) 59x47 (C) 35 (D) 6.5	M 8X20	PLAIN BORE	IV-2A-BA1-04-50-214
										IV-2A-BA1-01-50-214
										IV-2A-BA1-01E-50-214
										IV-2A-BA1-02-50-214
										IV-2A-BA1-02E-50-214
63 MM (2.5")	28	30	Polyurethane (PU)	82	57	83	(A) 55X42 (B) 70x58 (C) 42 (D) 8.5	M 12X25	PLAIN BORE	IV-2A-BA1-04-63-214
										IV-2A-BA1-01-63-214
										IV-2A-BA1-01E-63-214
										IV-2A-BA1-02-63-214
										IV-2A-BA1-02E-63-214
75 MM (3")	28	40	Polyurethane (PU)	93	63	87	(A) 55X42 (B) 70x58 (C) 42 (D) 8.5	M 12X25	PLAIN BORE	IV2A-BA1-04-75-214
										IV2A-BA1-01-75-214
										IV2A-BA1-01E-75-214
										IV2A-BA1-02-75-214
										IV2A-BA1-02E-75-214



A3 series



65-130 kg



Wheel Structure

Single ball bearing
PP wheel

Size : 75/100/125mm

IV-2A-BA3-04-75-211

IV-2A-BA3-01-100-211

IV-2A-BA3-01D-125-211

IV-2A-BA3-02-75-211

IV-2A-BA3-02D-100-211

Wheel dia (mm)	Tread width (mm)	Load capacity (kg.) Per Pc.	Wheel material	Loading hight (mm)	Swivel radius (mm)	Brake swivel radius (mm)	Plate size (mm)	Thread size (mm)	Bearing	NO. Model
75 MM (3")	32	90	Polyurethane (PU) Black	105.5	74	95	(A) 78X44 (B) 95X70 (C) 71X45 (D) 8.6	M 12X25	Single Ball Bearing	IV-2A-BA3-04-75-211
										IV-2A-BA3-01-75-211
										IV-2A-BA3-01D-75-211
										IV-2A-BA3-02-75-211
										IV-2A-BA3-02D-75-211
100 MM (4")	32	120	Polyurethane (PU) Black	130	86	96	(A) 78X44 (B) 95X70 (C) 71X45 (D) 8.6	M 12X25	Single Ball Bearing	IV-2A-BA3-04-100-211
										IV-2A-BA3-01-100-211
										IV-2A-BA3-01D-100-211
										IV-2A-BA3-02-100-211
										IV-2A-BA3-02D-100-211
125 MM (5")	32	130	Polyurethane (PU) Black	154.5	99	102	(A) 78X44 (B) 95X70 (C) 71X45 (D) 8.6	M 12X25	Single Ball Bearing	IV-2A-BA3-04-125-211
										IV-2A-BA3-01-125-211
										IV-2A-BA3-01D-125-211
										IV-2A-BA3-02-125-211
										IV-2A-BA3-02D-125-211



Wheel Structure

Derlin bearing
HR wheel

Size : 75/100/125mm

IV-2A-BA3-04-75-743

IV-2A-BA3-01-100-743

IV-2A-BA3-01D-125-743

IV-2A-BA3-02-75-743

IV-2A-BA3-02D-100-743

Wheel dia (mm)	Tread width (mm)	Load capacity (kg.) Per Pc.	Wheel material	Loading hight (mm)	Swivel radius (mm)	Brake swivel radius (mm)	Plate size (mm)	Thread size (mm)	Bearing	NO. Model
75 MM (3")	32	65	HARD RUBBER (HR)	105.5	74	95	(A) 78x45 (B) 95x70 (C) 71x45 (D) 8.6	M 12x25	Derlin	IV-2A-BA3-04-75-743
										IV-2A-BA3-01-75-743
										IV-2A-BA3-01D-75-743
										IV-2A-BA3-02-75-743
										IV-2A-BA3-02D-75-743
100 MM (4")	32	80	HARD RUBBER (HR)	130	86	96	(A) 78x45 (B) 95x70 (C) 71x45 (D) 8.6	M 12x25	Derlin	IV-2A-BA3-04-100-743
										IV-2A-BA3-01-100-743
										IV-2A-BA3-01D-100-743
										IV-2A-BA3-02-100-743
										IV-2A-BA3-02D-100-743
125 MM (5")	32	90	HARD RUBBER (HR)	154.5	99	102	(A) 78x45 (B) 95x70 (C) 71x45 (D) 8.6	M 12x25	Derlin	IV-2A-BA3-04-125-743
										IV-2A-BA3-01-125-743
										IV-2A-BA3-01D-125-743
										IV-2A-BA3-02-125-743
										IV-2A-BA3-02D-125-743




IV-ZA5-FX-100-PP-M



IV-ZA5-PL-150-PP-M



IV-ZA5-PK-200-PP-M



Wheel Structure

Double ball bearing
PP wheel
Size : 100/125/150
200mm

Wheel dia (mm)	Tread width (mm)	Load capacity (kg.) Per Pc.	Wheel material	Loading height (mm)	Swivel radius (mm)	Brake swivel radius (mm)	Plate size (mm)	Bearing	NO. Model
100 (4")	45	220	POLY PROPLENE (PP)	143	87	125	A) 92x67 B) 115X100 C) 76x76 D) 11	 Double Ball Bearing	IV-2A-ZA5-04-100-122
									IV-2A-ZA5-01-100-122
									IV-2A-ZA5-01D-100-122
									IV-2A-A5-100X50-122-WH
125 (5")	45	280	POLY PROPLENE (PP)	164	105	130	A) 92x67 B) 115X100 C) 76x76 D) 11	 Double Ball Bearing	IV-2A-ZA5-04-125-122
									IV-2A-ZA5-01-125-122
									IV-2A-ZA5-01D-125-122
									IV-2A-A5-125X50-122-WH
150 (6")	45	340	POLY PROPLENE (PP)	190	121	136	A) 92x67 B) 115X100 C) 76x76 D) 11	 Double Ball Bearing	IV-2A-ZA5-04-150-122
									IV-2A-ZA5-01-150-122
									IV-2A-ZA5-01D-150-122
									IV-2A-A5-150X50-122-WH
200 (8")	45	400	POLY PROPLENE (PP)	240	160	157	A) 92x67 B) 115X100 C) 76x76 D) 11	 Double Ball Bearing	IV-2A-ZA5-04-200-122
									IV-2A-ZA5-01-200-122
									IV-2A-ZA5-01D-200-122
									IV-2A-A5-200X50-122-WH



IV-10-FX-100-PU-G



IV-10-PL-150-PU-G



IV-10-PK-200-PU-G

 Wheel dia (mm)	 Tread width (mm)	 Load capacity (kg.) Per Pc.	 Wheel material	 Loading height (mm)	 Swivel radius (mm)	 Brake swivel radius (mm)	 Plate size (mm)		 Bearing	NO. Model
100 (4")	50	200	Polyurethane (PU)	135	87	125	(A) 92x67 (B) 114x98 (C) 76x76 (D) 11		 Double Ball Bearing	IV10-H-FX100-PU-G
										IV10-H-PL100-PU-G
										IV10-H-PK100-PU-G
										IV10-H-WH100-PU-G
150 (6")	50	300	Polyurethane (PU)	185	121	136	(A) 92x67 (B) 114x98 (C) 76x76 (D) 11		 Double Ball Bearing	IV10-H-FX150-PU-G
										IV10-H-PL150-PU-G
										IV10-H-PK150-PU-G
										IV10-H-WH150-PU-G
200 (8")	50	350	Polyurethane (PU)	232	160	157	(A) 92x67 (B) 114x98 (C) 76x76 (D) 11		 Double Ball Bearing	IV10-H-FX200-PU-G
										IV10-H-PL200-PU-G
										IV10-H-PK200-PU-G
										IV10-H-WH200-PU-G

TPR Ball caster with PP core, Plain Bearing CP housing

PRODUCT	 Wheel dia (mm)	 Tread width (mm)	 Load capacity (kg)	 Wheel material	 Loading height (mm)			NO. Model
	40 (1.5")		30	Thermoplastic Rubber (TPR)	52	38x38	27x27	IV-BC-PL40-TPR
	50 (2")		40	Thermoplastic Rubber (TPR)	60	40x40	30x30	IV-BC-PL50-TPR



IV31-FX-75-R



IV31-ST-100-R



IV31-PK-150-R



IVWH-IV31-100-R

Wheel dia (mm)	Tread width (mm)	Load capacity (kg.) Per Pc.	Wheel material	Loading height (mm)	Swivel radius (mm)	Brake swivel radius (mm)	Plate size (mm)	Stem size (mm)	Bearing Roller Bearing	NO. Model
75 (3")	20	50	Natural Rubber	99	32		(A) 62X52 (B) 84X72X2.5 (C) 6.3			IV31-FX-75-R
										IV31-PL-75-R
										IV31-PK-75-R
										IVWH-IV31-75-R
100 (4")	30	80	Natural Rubber	128	40		(A) 76X56 (B) 105X85X3 (C) 9	STEM 22ØX45 MM		IV31-FX-100-R
										IV31-PL-100-R
										IV31-PK-100-R
										IV31-ST-100-R
										IV31-SK-100-R
										IVWH-IV31-100-R
125 (5")	38	100	Natural Rubber	150	47		(A) 76X56 (B) 105X85X3 (C) 9	STEM 22ØX45 MM		IV31-FX-125-R
										IV31-PL-125-R
										IV31-PK-125-R
										IV31-ST-125-R
										IV31-SK-125-R
150 (6")	40	145	Natural Rubber	185	65		(A) 103X78 (B) 140X110X3.5 (C) 10	STEM 22ØX45 MM		IVWH-IV31-125-R
										IV31-FX-150-R
										IV31-PL-150-R
										IV31-PK-150-R
										IV31-ST-150-R
										IV31-SK-150-R
200 (8")	50	210	Natural Rubber	235	68		(A) 103X78 (B) 140X110X3.5 (C) 10			IVWH-IV31-150-R
										IV31-FX-200-R
										IV31-PL-200-R
										IV31-PK-200-R
										IVWH-IV31-200-R

Rubber loose wheel with steel core with roller bearing (Bore size 25 mm)

PRODUCT	Wheel dia (mm)	Wheel material	Tread width (mm)	Load capacity (kg.) Per Pc.	Bore Size MM	NO. Model
	160	Natural Rubber	40	145	25 mm	IVWH-IV31-160-R
	200		50	185		IVWH-IV31-200-R
	250		50	210		IVWH-IV31-250-R
	280		50	220		IVWH-IV31-280-R



IV 43, 44 series

Stainless
Steel Caster



130-150 kg



IV43-SS-FX-80-NY-W



IV43-SS-PL-100-NY-W



IV43-SS-PK-80-NY-W



Wheel Code : 20C
Whee made of white rylon
Stainless steel plain bearing

Wheel dia (mm)	Tread width (mm)	Load capacity (kg.) Per Pc.	Wheel material	Loading height (mm)	Swivel radius (mm)	Brake swivel radius (mm)	Plate size (mm)		Bearing	NO. Model
80 (3.2")	35	140 kg	Nylon	106	34.5		(A) 80x60 (B) 105x82.5 (D) 9		Plain Bearing	IV43-SS-FX-80-NY-W
										IV43-SS-PL-80-NY-W
										IV43-SS-PK-80-NY-W
										IV43-SS-BKT-80
100 (4")	35	150 kg	Nylon	128	37.5		(A) 80x60 (B) 105x82.5 (D) 9		Plain Bearing	IV43-SS-FX-100-NY-W
										IV43-SS-PL-100-NY-W
										IV43-SS-PK-100-NY-W
										IV43-SS-BKT-100



IV43-SS-FX-80-NY-W



IV43-SS-PL-100-NY-W




IV43-SS-PK-80-NY-W



Wheel tread is polyurethane,
Wheel center is nylon,
Stainless steel roller bearing

Wheel dia (mm)	Tread width (mm)	Load capacity (kg.) Per Pc.	Wheel material	Loading height (mm)	Swivel radius (mm)	Brake swivel radius (mm)	Plate size (mm)		Bearing	NO. Model
80 (3.2")	30	130 kg	Polyurethane PU	106	37.5		(A) 80x60 (B) 105x82.5 (D) 9		Roller Bearing	IV44-SS-FX-80-PU-R
										IV44-SS-PL-80-PU-R
										IV44-SS-PK-80-PU-R
										IV44-SS-BKT-80
100 (4")	30	150 kg	Polyurethane PU	127.5	40		(A) 80x60 (B) 105x82.5 (D) 9		Roller Bearing	IV44-SS-FX-100-PU-R
										IV44-SS-PL-100-PU-R
										IV44-SS-PK-100-PU-R
										IV44-SS-BKT-100

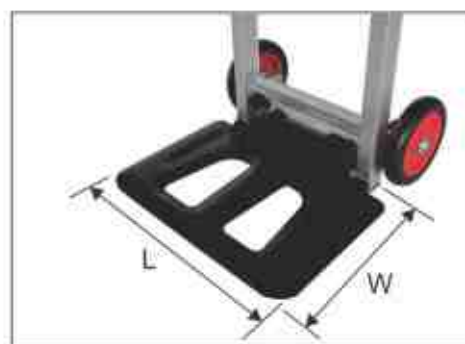

EVA



TPE

Model	IV-FHC-H-02.90-EVA
Material	Handle : Chrome-plated steel tube Frame : Aluminum Bottom Plate : Powder-coated steel
Overall size opened	L395xW415xH1080 mm
Overall size folded	L395xW190XH710 mm
Bottom plate	L392XW250 mm
Capacity	90 kg
Net weight	4.6 kg
Wheels	150 mm PP + EVA - Ethylene Vinyl Acetate Rubber tyre with PP core
Packing carton size	735x225x415 mm

Model	IV-FHC-H-02.90-TPE
Material	Handle : Chrome-plated steel tube Frame : Aluminum Bottom Plate : Powder-coated steel
Overall size opened	L395xW435xH1080 mm
Overall size folded	L395xW190XH710 mm
Bottom plate	L392XW250 mm
Capacity	90 kg
Net weight	5.2 kg
Wheels	150 mm PP + TPE - Thermoplastic Elastomer Tyre with PP core
Packing carton size	735x225x415 mm

Code : IV-PHT-D-150-4



Code : IV-PHT-D-300-5



Code	 Loading Capacity	 Platform height	 Size of the platform	 Wheel Dia.	 Overall height	 Total Weight	Caster Matching	Wheel Material	Caster Frame	Caster
IV-PHT-D-150-4	150 Kg	155 mm	725(L) mm 485(W) mm 825(H) mm	100 mm	860 MM	9.72 kg	2 Swivel+ 2 Fix	PU	Black Painted	100 mm
IV-PHT-D-300-5	300 Kg	190 mm	895(L) mm 590(W) mm 1000(H) mm	125 mm	880 Kg	13.8 kg	2 Swivel+ 2 Fix	PU	Black Painted	125 mm

Code : IV-PHT-2D-300-5



Code : IV-PHT-C-300-5



Code	 Loading Capacity	 Platform height	 Size of the platform	 Wheel Dia.	 Total Weight	Caster Matching	Wheel Material	Caster Frame	Caster
IV-PHT-2D-300-5	300 Kg	190 mm Top shelf height 785 mm	895(L) mm 590(W) mm 1000(H) mm	125 mm	23.8 kg	2 Swivel+ 2 Fix	PU	Black Painted	125 mm
IV-PHT-C-300-5	300 Kg	220 mm	910(L) mm 601(W) mm 890(H) mm	125 mm	25 kg	2 Swivel+ 2 Fix	PU	Black Painted	125 mm

PRODUCT	 Wheel material	 Wheel dia (mm)	 Load capacity (kg.) Per Pc.	 Thread size (mm) Stem size (mm)	NO. Model
 TH ST	Nylon	50 (2")	25	3/8" BSW x 15	IV-TWTH 50-NY-B
				Ø 11x22	IV-TWST 50-NY-B
 TH ST	Polyurethane	50 (2")	40	3/8" BSW x 15	IV-TWTH 50-PU-G
				Ø 11x22	IV-TWST 50-PU-G
 TH TK	Polyurethane	50 (2")	50	3/8" BSW x 15	IV-TWTH 50-NY-PU-W
					IV-TWTK 50-NY-PU-W
 TH TK	Polyurethane	50 (2")	40	3/8" BSW x 18 Plate Size (38"x38")	IV-TW-R-PL/PK 50-PU-G Available in set only (2+2)
 TH TK	Polyurethane	50 (2")	40	3/8" BSW x 18	IV-TW-R-TH/TK 50-PU-G Available in set only (2+2)

PRODUCT	 Wheel dia (mm)	 Tread width (mm)	 Load capacity (kg)	 Wheel material	 Loading height (mm)	 Swivel radius (mm)	  Thread size (mm) Stem size (mm)	NO. Model
	100 (4")	32	80	Thermoplastic Rubber (TPR)	139	39	THREAD M 12 X 25	IV15-L-TH-100-TPR-G
								IV15-L-TK-100-TPR-G
							STEM Ø22X45	IV15-L-ST-100-TPR-G
								IV15-L-SK-100-TPR-G
	125 (5")	32	100	Thermoplastic Rubber (TPR)	169	44	THREAD M 12 X 25	IV15-L-TH-125-TPR-G
								IV15-L-TK-125-TPR-G
							STEM Ø22X45	IV15-L-ST-125-TPR-G
								IV15-L-SK-125-TPR-G
	100 (4")	27	100	Thermoplastic Rubber (TPR)	131.5	37	THREAD M 12 X 25	IV33-L-TH-100-TPR-G
								IV33-L-TK-100-TPR-G
							STEM Ø22X45	IV33-L-ST-100-TPR-G
								IV33-L-SK-100-TPR-G
	125 (5")	32	110	Thermoplastic Rubber (TPR)	160	41	THREAD M 12 X 30	IV34-L-TH-125-TPR-G
								IV34-L-TK-125-TPR-G
	125 (5")	32	110	Thermoplastic Rubber (TPR)	160	41	STEM Ø22X45	IV34-L-ST-125-TPR-G
								IV34-L-ST-125-TPR-G



Twin Wheel





IV33-TW-PL50-TPRG





IV33-TW-PK75-TPRG

Wheel dia(mm)	Wheel material	Tread width (mm)	Load Capacity (kg.) Per Pc.	Load Height (mm)	Bearing	Plate Size (mm)	NO. Model
50(2")	Thermoplastic Rubber Grey	20	90	71	Single Ball Bearing	(A) 43x43	IV33-TW-PL50-TPRG
						(C) 60x60	IV33-TW-PK50-TPRG
75(3")	Thermoplastic Rubber Grey	25	150	103	Single Ball Bearing	(A) 55x48	IV33-TW-PL75-TPRG
						© 77x67	IV33-TW-PK75-TPRG

Ball Transfer Unit

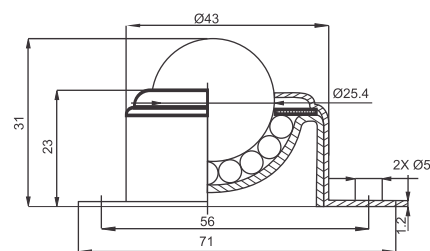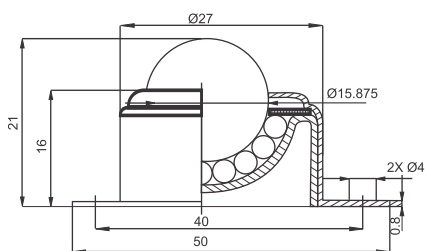

Wheel dia(mm)	Load Capacity (kg.) Per Pc.	Max 100 Kg.	Product Self Weight	NO. Model
15.875	10	15	38g	IV-BT-FL-15
25.40	25	30	130g	IV-BT-FL-25

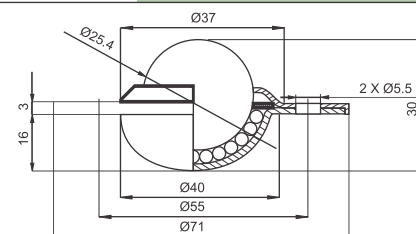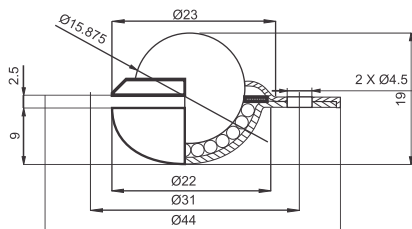

Wheel dia(mm)	Load Capacity (kg.) Per Pc.	Max 100 Kg.	Product Self Weight	NO. Model
15.875	10	15	40g	IV-BT-CL-15
25.40	25	30	150g	IV-BT-CL-25



IV77-FX-75-PP-M



IV77-PL-100-PP-M



IV77-PK-150-PP-M

 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (kg.) Per Pc.	 Wheel Material	 Loading Height (mm)	 Swivel Radius (mm)	 Brake Swivel Radius (mm)	 Bearing	 Plate size (mm)	NO. Model
75 (3")	38	160	Polypropylene (PP)	111	70	117	Double Ball Bearing	(A) 80x60 (B) 101x82 (C) 73x53 (D) 11	IV77-FX-75-PP-M IV77-PL-75-PP-M IV77-PK-75-PP-M
100 (4")	38	200	Polypropylene (PP)	136	86	122	Double Ball Bearing	(A) 80x60 (B) 101x82 (C) 73x53 (D) 11	IV77-FX-100-PP-M IV77-PL-100-PP-M IV77-PK-100-PP-M
150 (6")	38	300	Polypropylene (PP)	190	120	139	Double Ball Bearing	(A) 80x60 (B) 101x82 (C) 73x53 (D) 11	IV77-FX-150-PP-M IV77-PL-150-PP-M IV77-PK-150-PP-M

Polyurethane Wheel with C.I. Core Double Ball Bearing



IV-2A-ZA5-04-100-302



IV-2A-ZA5-01-150-302



IV-2A-ZA5-01D-150-302

 Wheel dia (mm)	 Tread width (mm)	 Load capacity (kg.) Per Pc.	 Wheel material	 Loading height (mm)	 Swivel radius (mm)	 Brake swivel radius (mm)	 Plate size (mm)	 Bearing	NO. Model
100 (4")	45	280	Polyurethane (PU) C.I. Core	143	87	125	A) 92x67 B) 115X100 C) 76x76 D) 11	Double Ball Bearing	IV-2A-ZA5-04-100-302 IV-2A-ZA5-01-100-302 IV-2A-ZA5-01D-100-302 IV-2A-A5-100X50-302-WH
150 (6")	45	430	Polyurethane (PU) C.I. Core	190	121	136	A) 92x67 B) 115X100 C) 76x76 D) 11	Double Ball Bearing	IV-2A-ZA5-04-150-302 IV-2A-ZA5-01-150-302 IV-2A-ZA5-01D-150-302 IV-2A-A5-150X50-302-WH
200 (8")	45	500	Polyurethane (PU) C.I. Core	240	160	157	A) 92x67 B) 115X100 C) 76x76 D) 11	Double Ball Bearing	IV-2A-ZA5-04-200-302 IV-2A-ZA5-01-200-302 IV-2A-ZA5-01D-200-302 IV-2A-A5-200X50-302-WH